


B432dn Specifications

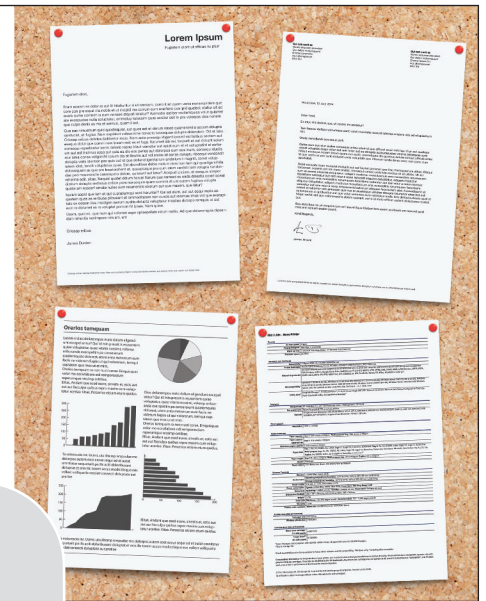

High performance A4 mono printing for the more demanding user

The B432dn delivers fast, high quality black and white printing to the more demanding user. Its flexible paper handling, ultra-reliable digital LED technology and a PostScript emulation all work to deliver superb print quality in a wide range of applications. Advanced power saving features and automatic double-sided printing reduces environmental impact. Reduce your running costs by using extra high capacity toner cartridges, offering you the support for all your current and future business needs.

High performance, improved productivity

Fast warm-up times, high speed processor and large memory enables the B432dn to power through high or low volume print jobs with ease. With Gigabit Ethernet as standard and an optional Wireless interface, sharing is made easy.

- Time to first print, 4.5 seconds
- A4 print speeds of up to 40ppm
- 5 second warm-up time from Deep Sleep mode
- 667MHz processor and 512MB RAM + 3GB eMMC memory
- PCL/PostScript emulations
- 10/100/1000 Ethernet
- Optional Wireless LAN 802.11a/b/g/n

High quality, versatile printing

The B432dn offers flexible media handling, digital LED print quality and the versatility to meet your businesses needs.

- From A6 to A4 and banners up to 1.3m long
- Print on card stock up to 163gsm
- 250 sheet paper tray and 530 sheet 2nd tray option
- 1200 x 1200dpi print resolution ensures pinsharp output every time
- Secure printing protects confidential documents
- Google Cloud print ready and compatible with AirPrint by Apple inc.
- Choose the toner size to suit your business needs, 3k, 7k or extra high capacity 12k toner for the lowest running costs

Reliable, ergonomic and easy to use

Simple ergonomic design makes life easy and OKI Europe's industry leading warranty provides total peace of mind.

- Compact, low profile design for ease of use
- Auto sensing 100 sheet Multi-purpose tray (MPT) for different paper types
- 2-line x 16-character LCD display for clear, real-time status

- Front USB interface enables direct printing for added convenience
- One click driver installation
- Three year warranty on registration of your product within 30 days

Powerful features reduce costs and environmental impact

Save paper and power usage whilst reducing your running costs. There is even a noise reduction mode for quieter working environments.

- Duplex printing as standard, reducing paper usage by printing on both sides
- Eco mode improves throughput performance and reduces energy consumption
- Quiet mode reduces noise levels and energy consumption
- 1.4W Deep Sleep mode and super fast recovery time saves power without impacting performance
- 'Auto Power Off' function saves energy
- Energy Star 2.0 compliant

A4	✓
Mono	✓
Duplex print	✓
Prints A6 to 210 x 1321mm, up to 163gsm	✓
1 – 10 users	✓



B432dn - Mono Printer

PRINTER	
Print speed	40ppm
Time to first print	Less than 4.5 seconds
Warm up time	5 seconds from Deep Sleep, 17 seconds from power on
Processor speed	667MHz

INTERFACE AND SOFTWARE	
Connectivity	Hi-Speed USB 2.0, 10/100/1000 Ethernet
Printer languages	PostScript3(Emulation), PCL5e, PCL6(XL), EPSON FX, IBM ProPrinter, XPS, PDF(v1.x)
Network & protocols	All major network protocols supported via ethernet card with internal web server for printer and network card set-up and management. TCP/IPv4&v6, AirPrint, Google Cloud Print, Net-BIOS over TCP, DHCP, BOOTP, HTTP, HTTPS, DNS, DDNS, WINS, UPNP, Bonjour, SMTP, POP3, SNMPv1&v3, SNT, IPP, IPPS, WSD Print, LLTD, IEEE802.1x, LPR, Port9100, Telnet, FTP, IPSec, WLAN802.11a/b/g/n
OS Compatibility ¹	Windows 7 (32-bit & 64-bit), Windows 8 (32-bit & 64-bit), Windows 8.1 (32-bit & 64-bit), Windows Server 2003 (32-bit & 64-bit), Windows Vista (32-bit & 64-bit), Windows Server 2008 (32-bit & 64-bit), Windows Server 2008 R2 (64-bit), Windows Server 2012 (64-bit), Windows Server 2012 R2 (32 bit & 64 bit); Linux PPD; Mac OS 10.6.8 - 10.7, 10.8, 10.9
Utility suite ¹	Template Manager ² , PrintSuperVision ² , Print Job Accounting ² , OKI LPR ² , Network Extension, Network Card Setup, Configuration Tool ² , Op-Panel Download Utility, Storage Device Manager ²

TYPEFACES	
Printer fonts	87 scaleable PCL and 136 PostScript fonts, 2 bitmap fonts, OCR-A/B
Dot matrix fonts	Epson FX and IBM PPR at various pitches
Barcode	10 types of one dimension with 26 variations: UPC-A, UPC-E, EAN/JAN-8, EAN/JAN-13, Interleaved2of5, Code39, Code 128, EAN/UCC-128, CODABAR, ZIP+4POSTNET; 2 types of two dimension: PDF417, QR code

PRINT QUALITY	
Resolution	1200 x 1200dpi

PAPER HANDLING	
Paper capacity	Tray 1: 250 sheets of 80gsm; Multi-purpose tray: 100 sheets of 80gsm
Paper capacity optional tray	Tray 2: 530 sheets of 80gsm
Maximum paper capacity	880 sheets of 80gsm
Paper sizes	Tray 1: A4, A5, B5(JIS), A6, Letter, Legal 13, Legal 14, Executive, Statement; Tray 2: A4, A5, B5(JIS), Letter, Legal 13, Legal 14, Executive; Multi-purpose tray: A4, A5, B5(JIS), A6, Letter, Legal 13, Legal 14, Executive, Statement, Envelopes: Monarch, Com-9, Com-10, DL, C5, C6; Duplex: A4, B5(JIS), Letter, up to Legal 14, Executive, 4 x 6", 5 x 7"
Paper weight	Tray 1/2: 60 to 120gsm; Multi-purpose tray: 60 to 163gsm; Duplex: 60 to 120gsm
Duplex	Standard
Paper output	150 sheets face down, 100 sheets face up (80gsm)

¹ Check local OKI website for latest driver releases and OS compatibility; ² Windows only; ³Including all consumables

Consumables Information: For the protection of your printer, and in order to ensure that you benefit from its full functionality, this model has been designed to operate only with genuine OKI toner cartridges. These can be identified by the OKI trademark. Any other toner cartridge may not operate at all, even if it is described as "compatible", and if it does work, your printer's performance and print quality may be degraded.

GENERAL FEATURES	
Memory	512MB RAM; 3GB eMMC
Environment	Operating temperature/ humidity: 10°C to 32°C/ 20% to 80% RH non-condensing Storage temperature/ humidity: -10°C to 43°C/ 10% to 90% RH non-condensing
Power supply	230 VAC +/- 10%, 50 or 60Hz +/-2%
Power consumption	Typical: 600W; Max: 900W; Idle: 80W; Power Save: 7W, Deep Sleep: 1.4W
Noise level	Operating: 55dB(A) or less; Standby: 30dB(A) or less; Power save: Background level
Dimensions (HxWxD)	245 x 387 x 364mm; with 2nd tray 383 x 387 x 364mm
Weight ³	12kg
Duty cycle	Maximum: 80,000 pages/month; Recommended: 500 - 5,000 pages/month
Warranty	3 years extended warranty upon registration within 30 days of purchase
Product order numbers	B432dn: 45858302 (2AC) / 45762012 (Euro)

ACCESSORIES (ORDER NUMBERS)	
2nd paper tray	44575714
Wireless LAN Module	45830201

CONSUMABLES (ORDER NUMBERS)	
Black toner cartridge* (3,000 pages)	45807102
Black toner cartridge* (7,000 pages)	45807106
Black toner cartridge* (12,000 pages)	45807111
Image drum** (25,000 pages)	44574302

* Toner: Number of A4 pages yield compliant with ISO/IEC 19752. Printer shipped with toner for 2,000 pages.

** Drum: Average life



3 Year Warranty

Our devices are manufactured to the highest standards of quality and technology, which has been confirmed by independent tests. We are so convinced of the high quality of our products that we are offering you an extension of the standard warranty period to 3 years at no extra cost. Simply register your product within 30 days of purchase to be eligible for our unique all inclusive offer. For further information please visit: www.okiuser.com Without registration, the standard pan-European 1 year warranty applies.

OKI SYSTEMS (IRELAND) LTD.

The Square Industrial Complex
Tallaght
Dublin 24
Ireland
Tel: +353 1 404 9590
Fax: +353 1 404 9591
www.oki.ie

